



Technical Specification | Tank Pumps

Heavy Duty 10m

Part No: FP2066

ASPEN-5/09

Dimensions:

Height: 265mm
Width: 300mm
Depth: 150mm
Weight: 4.3kg

Power Supply:

Pump rating:
230V AC, 0.49A, 150W
Alternative voltages available

Electrical Connections:


Brown: Live
Blue: Neutral
Green/yellow: Earth
2 x Black: Safety switch

Other Features:

- Tank capacity: 4 litres
- Non-return valve
- No siphoning back
- 4 amps pre-wired safety switch
- Plastic tank and pump unit
fire retardant plastics
- 2 inlet positions: 40mm \varnothing
- Outlet size: 10mm

Performance:

- Water flow rate:
1250 litres/hour
- 10 metre discharge head

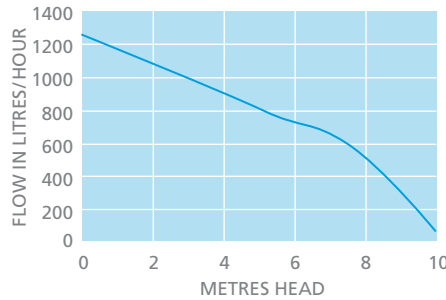

Service Guide:

Flush the pump thoroughly with anti-bacterial wash every 6 months to avoid sludge build-up in the pump housing.



The Aspen Heavy Duty pumps are designed for the rapid removal of condensate. They are particularly useful in situations where multiple refrigeration units are installed, or where large refrigeration systems deposit considerable quantities of condensate at one time.

The pump unit is robustly constructed and designed to give reliable performance. This is particularly important in environments where efficient cleanliness is of utmost importance. Two floats provide the operational control, one to operate the pump, and the other a safety float to be wired into the refrigeration unit control circuit.

The Heavy Duty tank pumps have a greater water flow rate than the Hi-flow tank pumps, for more heavy duty applications.



Apex Way Hailsham
East Sussex BN27 3WA
T: +44 (0)1323 848842
F: +44 (0)1323 848846
sales@aspenspumps.com
www.aspenpumps.com